



Three Phase Standard And Fast Recovery Rectifiers

DESCRIPTION

This series of high-current three-phase bridge rectifiers are constructed with hermetically sealed rectifiers built with the same design and construction techniques used in military applications for the upmost in reliability. These include voidless glass encapsulation and internal "Category 1" metallurgical bonds. These 15A to 25A rectifier bridges are available with working peak reverse voltage ratings of 100 to 600 V per leg.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Current ratings to 25 amps
- V_{RWM} from 100 to 600 volts (see [part nomenclature](#) for all options)
- 150 °C junction temperature
- Surge ratings to 150 amps
- Recovery times to 500 ns
- MIL-PRF-19500 similarity
- RoHS compliant versions available

APPLICATIONS / BENEFITS

- Electrically isolated aluminum case
- Controlled avalanche characteristics

MAXIMUM RATINGS

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-65 to +150	°C
Thermal Resistance Junction-to-Case (678 and 682 series)	$R_{\theta JC}$	1.5	°C/W
Thermal Resistance Junction-to-Case (695 and 696 series)	$R_{\theta JC}$	3.0	°C/W
Maximum Average DC Output Current: @ $T_C = 55$ °C	I_o	25 15 20 15	A
Maximum Average DC Output Current: @ $T_C = 100$ °C	I_o	18.5 9 14 9	A
Forward Surge Current (Peak): @ $T_C = 100$ °C	I_{FSM}	150 80 150 60	A
Solder Temperature @ 10 s		260	°C



(Actual appearance may vary)

NC Package

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

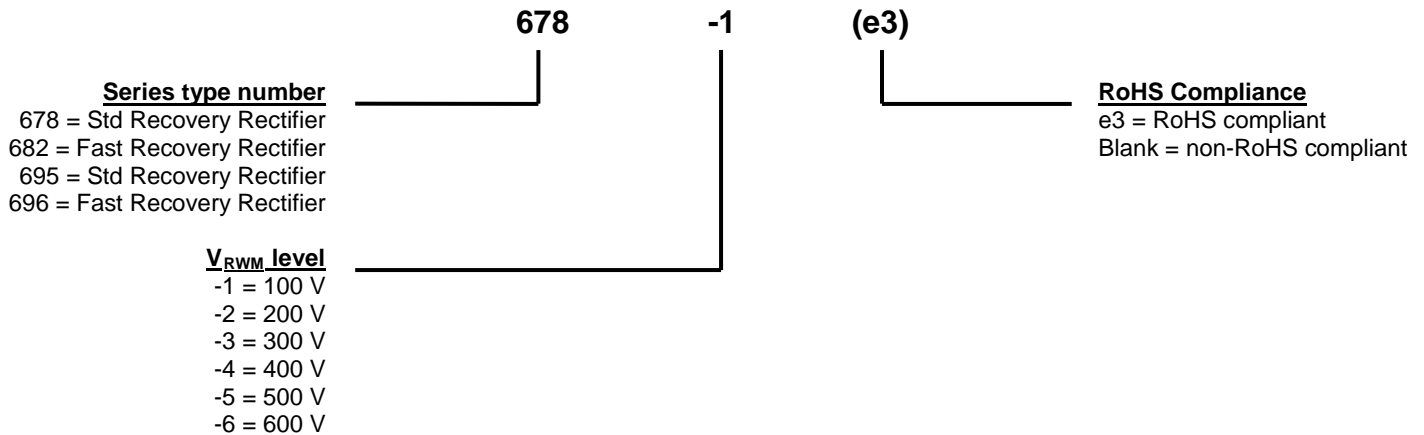
Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Aluminum
- TERMINALS: Tin/lead or RoHS compliant matte tin
- MARKING: Alternating current input: AC
Cathode positive output: +
Anode negative: -
Part number is printed on the body
- WEIGHT: Approximately 30 grams
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
I_{FSM}	Surge Peak Forward Current: The forward current including all nonrepetitive transient currents but excluding all repetitive transients (ref JESD282-B)
I_O	Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
V_F	Forward Voltage: A positive dc anode-cathode voltage the device will exhibit at a specified forward current.
I_R	Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V_R .
$V_{(BR)}$	Breakdown Voltage: A voltage in the breakdown region.
V_{RWM}	Working Peak Reverse Voltage: The peak voltage excluding all transient voltages (ref JESD282-B). Also sometimes known historically as PIV.
t_{rr}	Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified decay point after a peak reverse current occurs.

ELECTRICAL CHARACTERISTICS

PART NUMBER (Note 1)	MAX FORWARD VOLTAGE PER LEG V_F (Note 2)	MAX REVERSE PEAK CURRENT $I_R @ V_{RWM}$ (Note 1)		MAX RECOVERY TIME t_{rr} ($I_F = 1.0 A$, $I_{RM} = 1.0 A$, $I_{R(REC)} = 0.5 A$)
		@ 25 °C	@ 25 °C	
	Volts	μA	μA	ns
678	1.2 @ 10 A	10	200	-
682	1.2 @ 6 A	10	200	500
695	1.2 @ 2 A	5	150	-
696	1.2 @ 2 A	5	150	500

NOTES: 1. MAX WORKING PEAK REVERSE VOLTAGE (V_{RWM}) numbering:

PART NUMBER				WORKING PEAK REVERSE VOLTAGE V_{RWM}	MINIMUM BREAKDOWN VOLTAGE $V_{(BR)}$
Std. Recovery		Fast Recovery		Volts	Volts
678-1	695-1	682-1	696-1	100	110
678-2	695-2	682-2	696-2	200	220
678-3	695-3	682-3	696-3	300	330
678-4	695-4	682-4	696-4	400	440
678-5	695-5	682-5	696-5	500	550
678-6	695-6	682-6	696-6	600	660

2. Pulse test: Pulse width 300 μ sec, duty cycle 2%.

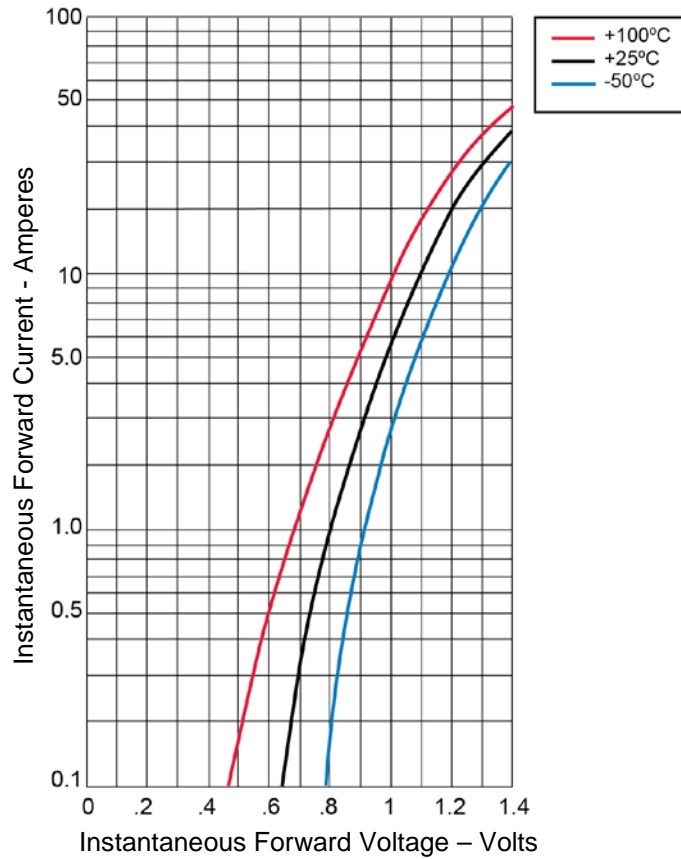
GRAPHS


FIGURE 1
Typical Forward Characteristics – Per Leg 678 Series

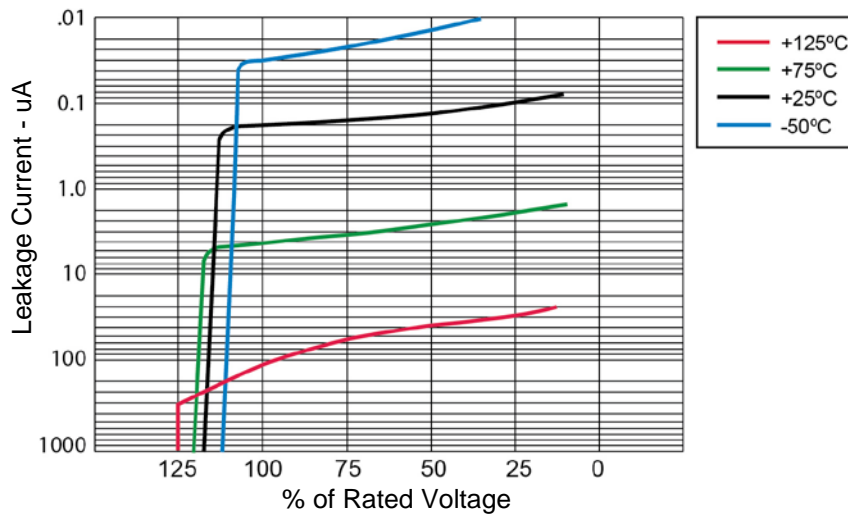


FIGURE 2
Typical Reverse Leakage Current – Per Leg 678 & 682 Series

GRAPHS (continued)

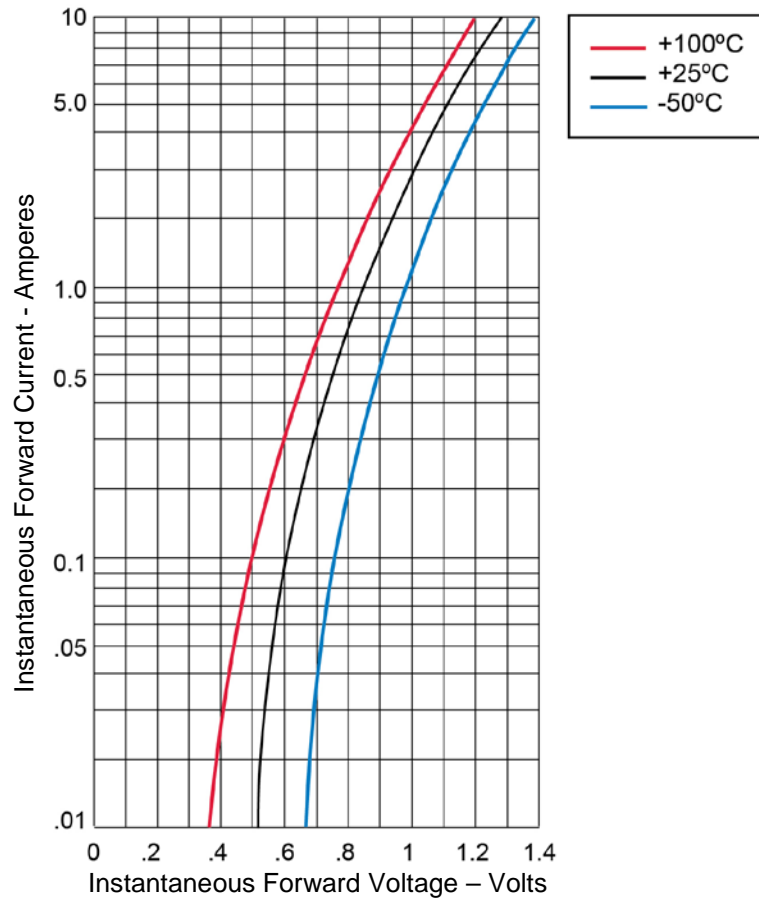
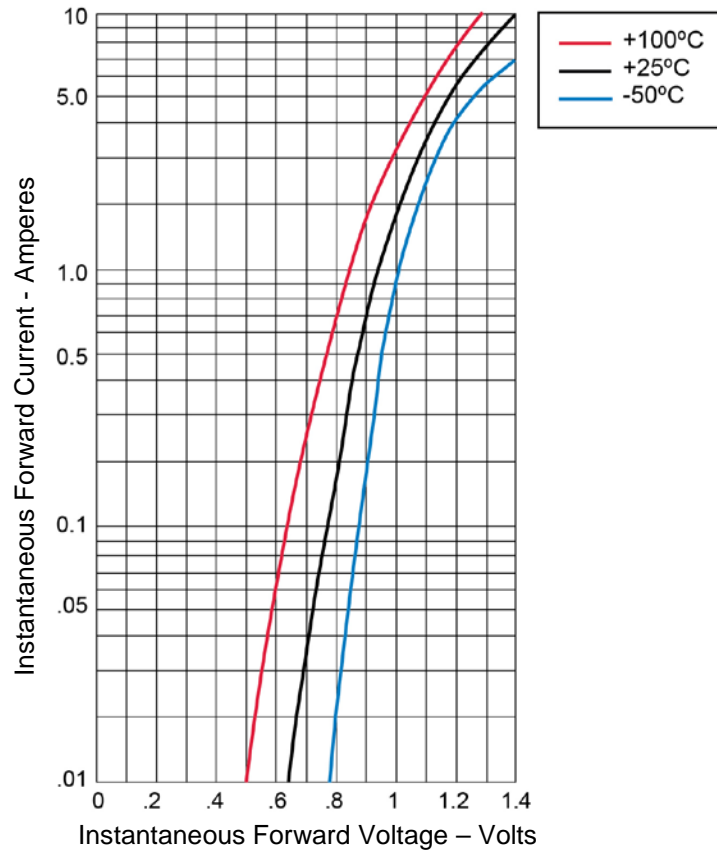
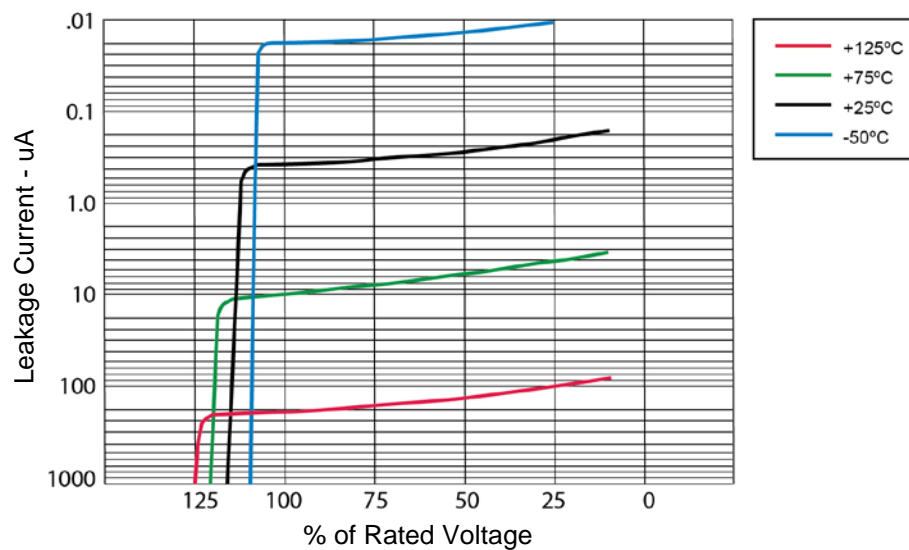
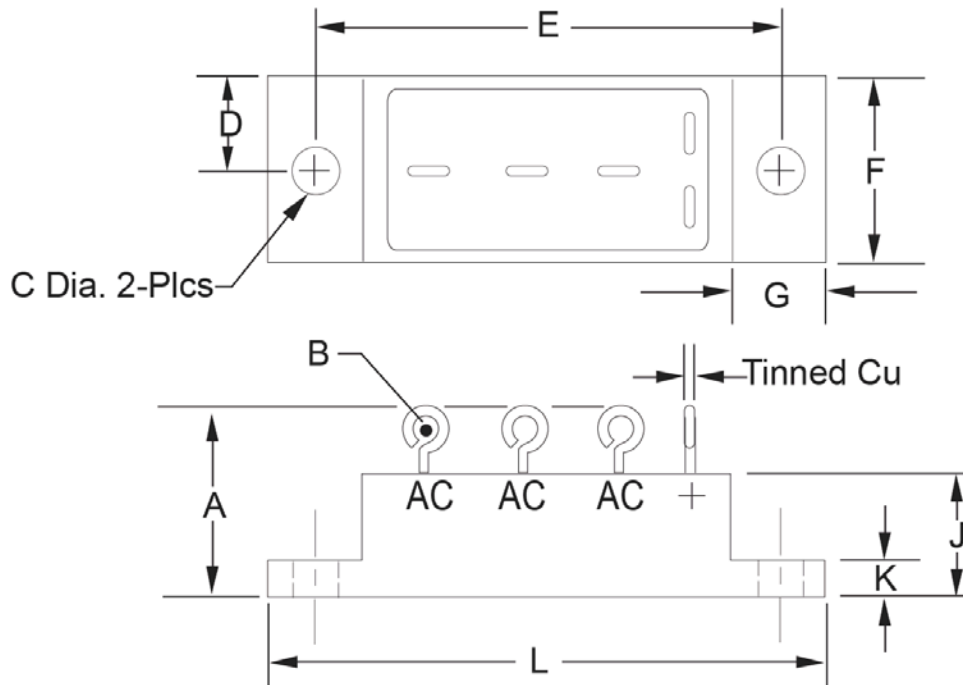


FIGURE 3
Typical Forward Characteristics – Per Leg 682 Series

GRAPHS (continued)

FIGURE 5
Typical Forward Characteristics – Per Leg 695 & 696 Series

FIGURE 6
Typical Reverse Leakage Current – Per Leg 695 & 696 Series

PACKAGE DIMENSIONS


Ltr	Dimensions		Dimensions	
	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	-	0.820		20.83
B	0.09 TYP		2.29 TYP	
C (dia)	0.164	0.174	4.17	4.42
D	0.365	0.385	9.27	9.78
E	1.870	1.880	47.50	47.75
F	0.740	0.760	18.80	19.30
G	0.370	0.390	9.40	9.91
H	0.40 TYP		1.02 TYP	
J	0.486	0.506	12.34	12.85
K	0.115	0.135	2.92	3.42
L	2.240	2.260	56.90	57.40